www.lightbreeze.net
support@lightbreeze.net

IP KVM-1700CB Series

8ports/16ports 1U rack mount 17'' LED KVM drawer over IP

Main features

« KVM (keyboard, video ,mouse) access over IP and analogous telephone line (modem needed) .

« Full control under any OS, in BIOS mode , during boot, at Blue Screen

« 256 bit SSL encryption of all transmitted data and certificate management

« Port to connect a user console for direct analogous access to KVM switch

« Can be used with most standard KVM

« To switch the host computer though the hotkey or OSD menu, which can manage up to 512 computers.

« Password security protection, only authorized users can view and manage on-line computer.

« Support a variety of brand industrial computer and the server: EVOC/Lenovo/IBM/DELL/HP/SUN, etc

« Support various operating system: Microsoft, Linux, Unix, etc.

Introduction

www.lightbreeze.net
support@lightbreeze.net

« IP-KVM switch can save your Money ,Time, Space, Equipment and Power . IP KVM switch defines a new class of remote KVM switch devices. IP KVM switch combines digital remote KVM access via IP networks with comprehensive and integrated system management.

« IP KVM Switch provides convenient, remote KVM access and control via LAN or internet . it captures, digitizes, and compresses videa signal and transmits it with keyboard and mouse signals to and from a remote computer. IP KVM switch provides a non-intrusive solution for remote access and control . Remote access and control software runs on its embedded processors only but not on mission-critical servers, so that there is no interference with server operation or inpact on network performance.

Specification

Model	IPKVM-1708CB	IPKVM-1716CB
Computer connect	Direct : 8	Direct : 16
	Max :256	Max : 512
Connector port	8/16 * HDB-15 female (Yellow)	
IP Module console	1* RJ45 port ,1* VGA port (male), 1* USB	
Selection connection	Support daisy-chained serial connection(8 levels) and stacking cascade connection (2 levels).	
Keyboard	104 Mechanical mute Keyboard	
Mouse	Touchpad	
Switch Mode	Hotkey , OSD Menu	
Auto scanning interval	5 - 99 second	
Power input	DC12V input , (AC100-240V 47-63Hz, 35W) optional	
LED Indicator	Power indicator	2
	Selection indicator	16
	Boost on-line indicator	16
	Num Lock	1
	Caps Lock	1
	Scroll Lock	1
Work environment	Operating Temp	-10°C~60°C
	Storage Temp	-20°C~70°C
	Humidity	0%-95%RH
Cabinet Material	high-strength and Anti-corrosive steel plate	
Color	Insulated black (optional)	

For Cabinet	800-1040mm
Net weight	15KG-18KG
Gross Weight	18KG-22KG
Dimension	610mm*480.4mm*44mm (L x W x H)
Package	738mm*608mm*195mm (L x W x H)
Certificate	CE , FCC , RHOS

Ordering information

IPKVM-1708CB	1U Rack mount 17" TFT LED KVM switch, W/ Keyboard +touchpad, W/ 8 VGA port over IP access, W/ 12V power supply
IPKVM-1716CB	1U Rack mount 17" TFT LED KVM switch, W/ Keyboard + touchpad , W/ 16 VGA port over IP access, W/ 12V power supply

IO View

Drawing

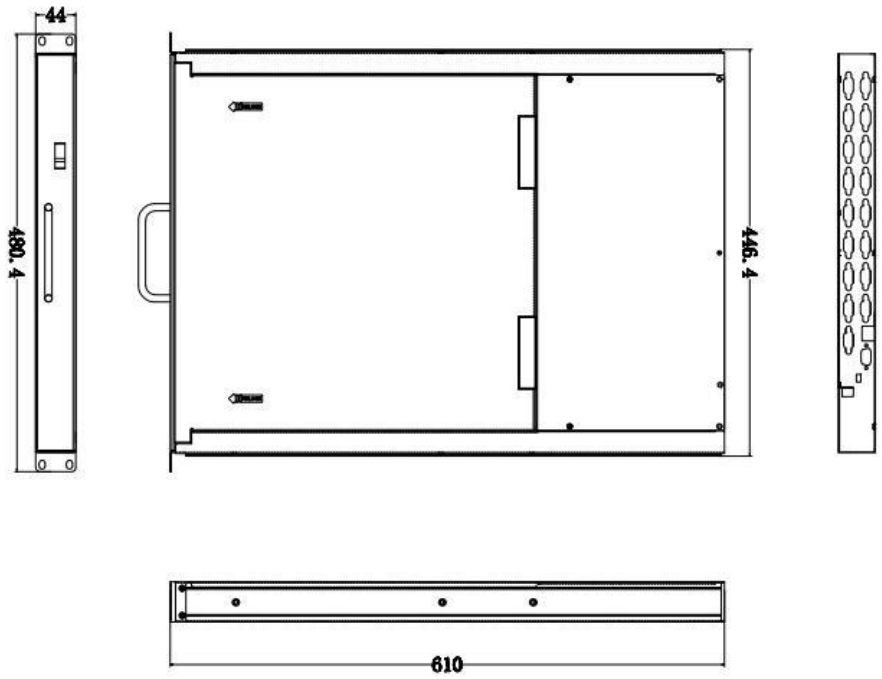

Accessories