



KVM-1900UT Series

CAT5 8ports/16ports/ 32ports 1U rack mount 19" LED KVM drawer



Main features

- « 19" 1U rack mount 19" LED KVM switch with touch pad+Mouse +104keys keyboard with integrated Digital&E-switch keys.
- « Supports front USB for keyboard/mouse
- « Excellent video effects, the best resolution is up to 1280*1024@ 75HZ.
- « Using RJ-45 interface, the CAT5/ CAT5E/CAT6 UTP cable are connected to the host computer ,control distance is up to 20M.
- « With 21 electronic al gain adjustment, it can avoid signal attenuation cause by distance problem .
- « Support IP module (Optional)

Introduction

- « Withdrawing installation design, the length can be adjusted to fit the rack space.
- « Humanized design, can be installed and removed by only one person , which improves the efficiency of the administrator.
- « To switch the host computer though the hotkey or OSD menu, which can manage up to 1024 computers.
- « Password security protection, only authorized users can view and manage on-line computer.
- « Support a variety of brand industrial computer and the sever, eg: EVOC / Lenovo / IBM



/ DELL/ HP/ SUN, ect.

« Support various operating system: Window XP, 7 /8 / 10 ,Microsoft, Linux, Unix,etc.

Specification

Specification				
Model	KVM-1908UT		KVM-1916UT	KVM-1932UT
	Direct : 8		Direct : 16	Direct: 32
Computer connect	Max : 256		Max : 512	Max : 1024
Keyboard	104 Mechanical mute Keyboard			
Mouse	Touchpad			
Switch Mode	Hotkey , OSD Menu			
Switch Scan Time	1-255 second (OSD adjustable)			
Cable Port (CAT5 connected network	Connector port	8	/16 / 32 * CAT5 (RJ45	port)
cable is up to 200M	Power supply 1 * 3 pin AC power supply socket			
Panel	Size	19" TFT LED		
	Resolution	1024 * 1280 @75HZ		
	Max Color	16.2M		
	Brightness	300nit		
	Contrast ratio	700:1		
	Pixel Pitch	0.297 x 0.297 mm		
Work environment	Operating Temp	-10℃~60℃		
	Storage Temp	-20℃~70℃		
	Humidity	0%-95%RH		
Power input	DC12V input , (AC100-240V 47-63Hz, 35W) optional			
Cabinet Material	high-strength and Anti-corrosive steel plate			
Color	Insulated black (optional)			
For Cabinet	800-1040mm			
Net weight	12KG			
Gross Weight	16kG			
Dimension(Lx Wx H)	600mm*480mm*44mm			
Package (L x W x H)	738mm*608mm*195mm			
Certificate	CE, FCC, RHOS			


Ordering information


KVM -1908UT	1U Rack mount 19" TFT LED KVM switch, W/ 8 RJ45 port , W/ 12V pov	
	supply.	



KVM -1916UT	1U Rack mount 19" TFT LED KVM switch , W/ 16 RJ45 port , W/12V
	power supply,
KVM-1932UT	1U Rack mount 19" TFT LED KVM switch , W/ 32 RJ45 port , W/ 12V
	power supply.

Drawing

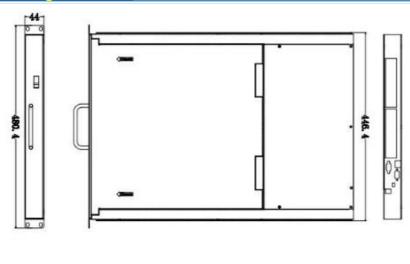



Accessories

