

KVM-1500M series

1port/4ports/8ports/16ports 1U rack mount 15" LED KVM drawer



Main features

- « 19" 1U rack mount 15" LED KVM switch with touch pad+Mouse
- « 104keys keyboard with integrated Digital&E-switch keys.
- « Supports 1024*768@ 75HZ resolution, 250 nit brightness.
- « Supports front USB for keyboard/mouse
- « Support USB+PS2 local console
- « Supports computer indicator when user switch to another computer.
- « Support cascading connection, max up to 512 computer.

Introduction

- « Withdrawing installation design, the length can be adjusted to fit the rack space.
- « Humanized design, can be installed and removed by only one person , which improves the efficiency of the administrator.
- « To switch the host computer though the hotkey or OSD menu, which can manage up to

512 computers.

« Password security protection, only authorized users can view and manage on-line computer.

« Support a variety of brand industrial computer and the sever, eg: EVOC / Lenovo / IBM / DELL / HP/ SUN, ect .

« Support various operating system: Window XP, 7 /8 / 10 ,Microsoft, Linux, Unix,etc.

Specification

Model	KVM-1501M	KVM-1504M	KVM-1508M	KVM-1516M
Computer connect	Direct 1	Direct 4	Direct 8	Direct 16
	Max:1	Max : 128	Max : 256	Max: 512
Keyboard	104 Mechanical mute Keyboard			
Mouse	Touchpad			
Switch Mode	Hotkey , OSD Menu			
Switch Scan Time	1-255 second （ OSD adjustable ）			
Cable Port	Local Console	Keyboard / Mouse/ Display (2*USB +2*PS/2+1* HDB-15 female)		
	Connector port	1/ 4 / 8 /16 * HDB-15 female (Yellow)		
	Power supply	1 * 3 pin AC power supply socket		
Panel	Size	15” TFT LED		
	Resolution	1024 * 768		
	Max Color	16.7M		
	Brightness	250nit		
	Contrast ratio	700:1		
	Pixel Pitch	0.297 x 0.297 mm		
Power input	12V DC input (AC100-240V 47-63Hz, 35W)optional			
Work environment	Operating Temp	-10℃~60℃		
	Storage Temp	-20℃~70℃		
	Humidity	0%-95%RH		
Cabinet Material	high-strength and Anti-corrosive steel plate			
Color	Insulated black (optional)			
For Cabinet	800-1040mm			
Net weight	12KG			
Gross Weight	15KG~19KG			

Dimension (L x W x H)	446mm*480.4mm*44mm(KVM-1501M); 520mm*480.4mm*44mm (KVM-1504M/1508M/1516M)
Package (L x W x H)	708mm*608mm*195mm
Certificate	CE , FCC , RHOS

Ordering information


KVM - 1501M	1U Rack mount 15" TFT LCD KVM switch, W/ keyboard +touchpad , W/ 1 port VGA , W/ 12V power supply, W/ USB cable.
KVM - 1504M	1U Rack mount 15" TFT LCD KVM switch, W/ keyboard +touchpad , W/ 4 port VGA , W/ 12V power supply, W/ USB cable.
KVM - 1508M	1U Rack mount 15" TFT LCD KVM switch, W/ keyboard +touchpad , W/ 8 port VGA , W/ 12V power supply, W/ USB cable.
KVM - 1516M	1U Rack mount 15" TFT LCD KVM switch, W/ keyboard +touchpad , W/ 16 port VGA , W/ 12V power supply, W/ USB cable.

IO View





Drawing

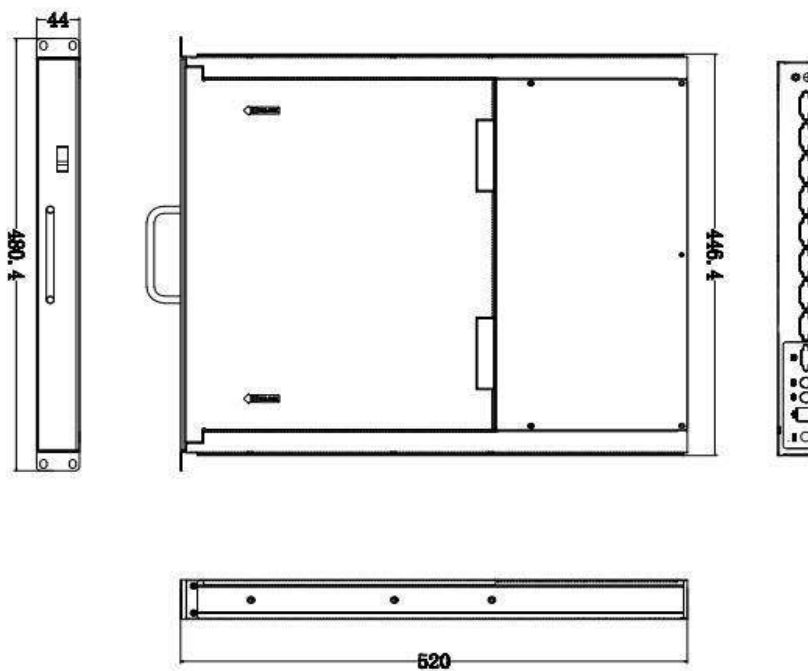



KVM-1700M series

1port /4ports/8ports/16ports 1U rack mount 17" LED KVM drawer



Main features

- « 19" 1U rack mount 17" LED KVM switch with touch pad+Mouse
- « 104keys keyboard with integrated Digital&E-switch keys.
- « Supports 1024*1280 @ 75HZ resolution, 250 nit brightness.
- « Supports front USB for keyboard/mouse
- « Support USB+PS2 local console
- « Supports computer indicator when user switch to another computer.
- « Support cascading connection, max up to 512 computer.

Introduction

- « Withdrawing installation design, the length can be adjusted to fit the rack space.
- « Humanized design, can be installed and removed by only one person , which improves the efficiency of the administrator.
- « To switch the host computer though the hotkey or OSD menu, which can manage up to 512 computers.
- « Password security protection, only authorized users can view and manage on-line computer.
- « Support a variety of brand industrial computer and the sever, eg: EVOC / Lenovo / IBM / DELL / HP/ SUN, ect .

« Support various operating system: Window XP, 7 / 8 / 10 ,Microsoft, Linux, Unix,etc.

Specification

Model	KVM-1701M	KVM-1704M	KVM-1708M	KVM-1716M
Computer connect	Direct 1	Direct 4	Direct 8	Direct 16
	Max:1	Max : 128	Max : 256	Max: 512
Keyboard	104 Mechanical mute Keyboard			
Mouse	Touchpad			
Switch Mode	Hotkey , OSD Menu			
Switch Scan Time	1-255 second （ OSD adjustable ）			
Cable Port	Local console	Keyboard / Mouse/ Display (2*USB +2*PS/2+1* HDB-15 female ）		
	Connector port	1/ 4 / 8 /16 * HDB-15 female (Yellow)		
	Power supply	1 * 3 pin AC power supply socket		
Panel	Size	17” TFT LED		
	Resolution	1024 * 1280		
	Max Color	16.7M		
	Brightness	300nit		
	Contrast ratio	700:1		
	Pixel Pitch	0.297 x 0.297 mm		
Power input	DC12V input （ AC100-240V 47-63Hz, 35W ） optional			
Work environment	Operating Temp	-10℃~60℃		
	Storage Temp	-20℃~70℃		
	Humidity	0%-95%RH		
Cabinet Material	high-strength and Anti-corrosive steel plate			
Color	Insulated black (optional)			
For Cabinet	800-1040mm			
Net weight	12KG-16KG			
Gross Weight	16KG-21KG			
Dimension(L x W x H)	448*480.4*44mm(KVM-1701M); 567.8*480.4*44mm(KVM-1704M/ 1708M/ 1716M)			
Package (L x W x H)	708mm*608mm*195mm			
Certificate	CE , FCC , RHOS			


Ordering information

KVM - 1701M	1U Rack mount 17" TFT LCD KVM switch, W/ keyboard +touchpad , W/ 1 port VGA , W/ 12V power supply, W/ USB cable.
KVM - 1704M	1U Rack mount 17" TFT LCD KVM switch, W/ keyboard +touchpad , W/ 4 port VGA , W/ 12V power supply, W/ USB cable.
KVM - 1708M	1U Rack mount 17" TFT LCD KVM switch, W/ keyboard +touchpad , W/ 8 port VGA , W/ 12V power supply, W/ USB cable.
KVM - 1716M	1U Rack mount 17" TFT LCD KVM switch, W/ keyboard +touchpad , W/ 16 port VGA , W/ 12V power supply, W/ USB cable.

IO View



Drawing

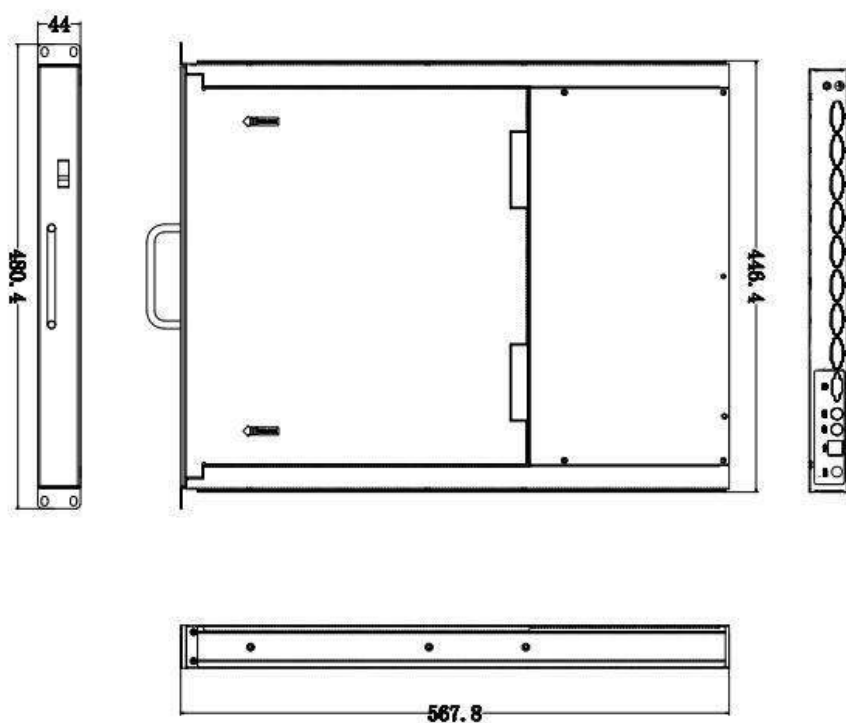

Accessories



On the top of Cartons:

VGA Cable

A pair of hanging ears

Warranty card and User Manual

Power cord

Power Adapter



On bottom of Cartons:

VGA Cable



KVM-1900M series

1port / 4ports/8ports/16ports 1U rack mount 19" LED KVM drawer



Main features

- « 19" 1U rack mount 19" LED KVM switch with touch pad+Mouse
- « 104keys keyboard with integrated Digital&E-switch keys.
- « Supports 1280*1024@ 75HZ resolution, 300nit brightness.
- « Supports front USB for keyboard/mouse
- « Support USB+PS2 local console
- « Supports computer indicator when user switch to another computer.
- « Support cascading connection, max up to 512 computer.

Introduction

- « Withdrawing installation design, the length can be adjusted to fit the rack space.
- « Humanized design, can be installed and removed by only one person , which improves the efficiency of the administrator.
- « To switch the host computer though the hotkey or OSD menu, which can manage up to 512 computers.
- « Password security protection, only authorized users can view and manage on-line computer.

« Support a variety of brand industrial computer and the sever, eg: EVOC / Lenovo / IBM / DELL / HP/ SUN, ect .

« Support various operating system: Window XP, 7 /8 / 10 ,Microsoft, Linux, Unix,etc.

Specification

Model	KVM-1901M	KVM-1904M	KVM-1908M	KVM-1916M
Computer connect	Direct 1	Direct 4	Direct 8	Direct 16
	Max:1	Max : 128	Max : 256	Max: 512
Keyboard	104 Mechanical mute Keyboard			
Mouse	Touchpad			
Switch Mode	Hotkey , OSD Menu			
Switch Scan Time	1-255 second （ OSD adjustable ）			
Cable Port	Local console	Keyboard / Mouse/ Display (2*USB +2*PS/2+1* HDB-15 female)		
	Connector port	1/ 4 / 8 /16 * HDB-15 female (Yellow)		
	Power supply	1 * 3 pin AC power supply socket		
Panel	Size	19” TFT LED		
	Resolution	1024 * 1280		
	Max Color	16.7M		
	Brightness	300nit		
	Contrast ratio	700:1		
	Pixel Pitch	0.297 x 0.297 mm		
Power input	12V DC input (AC100-240V 47-63Hz, 35W)optional			
Work environment	Operating Temp	-10℃~60℃		
	Storage Temp	-20℃~70℃		
	Humidity	0%-95%RH		
Cabinet Material	high-strength and Anti-corrosive steel plate			
Color	Insulated black (optional)			
For Cabinet	800-1040mm			
Net weight	13KG-17KG			
Gross Weight	17KG-22KG			
Dimension(Lx W x H)	610mm*480.4mm*44mm			
Package (L x W x H)	738mm*608mm*195mm			
Certificate	CE , FCC , RHOS			

Ordering information


KVM - 1901M	1U Rack mount 19 inch TFT LCD KVM switch, W/ keyboard +touchpad , W/ 1 port VGA , W/ 12V power supply, W/ USB cable.
KVM - 1904M	1U Rack mount 19 inch TFT LCD KVM switch, W/ keyboard +touchpad , W/ 4 port VGA , W/ 12V power supply, W/ USB cable.
KVM - 1908M	1U Rack mount 19 inch TFT LCD KVM switch, W/ keyboard +touchpad , W/ 8 port VGA , W/ 12V power supply, W/ USB cable.
KVM - 1916M	1U Rack mount 19 inch TFT LCD KVM switch, W/ keyboard +touchpad , W/ 16 port VGA , W/ 12V power supply, W/ USB cable.

IO View





Drawing

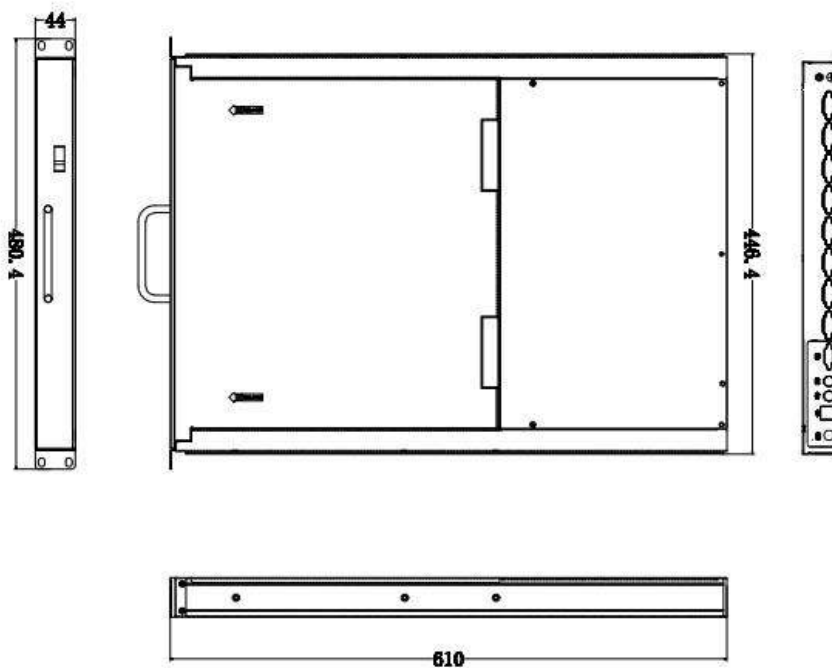

KVM-1901S

1port 1U rack mount 19" LED KVM drawer



Main features

- « 19" 1U rack mount LED KVM switch with touch pad+Mouse +104keys keyboard with integrated Digital&E-switch keys.
- « Supports front USB for keyboard/mouse
- « Support USB+PS2 local console
- « Excellent video effects, the best resolution is up to 1920*1080@ 75HZ.

Introduction

- « Withdrawing installation design, the length can be adjusted to fit the rack space.
- « Humanized design, can be installed and removed by only one person , which improves the efficiency of the administrator.
- « To switch the host computer though the hot key or OSD menu.
- « Password security protection, only authorized users can view and manage on-line computer.
- « Support a variety of brand industrial computer and the sever, eg: EVOC / Lenovo / IBM / DELL / HP/ SUN, etc.
- « Support various operating system: Window XP, 7 /8 / 10 ,Microsoft, Linux, Unix,etc.

Specification

Model	KVM-1901S
Computer connect	Direct 1

Keyboard	104 Mechanical mute Keyboard	
Mouse	Touch pad	
Switch Mode	Hot key , OSD Menu	
Switch Scan Time	1-255 second (OSD adjustable)	
Cable Port	D-SUB15(LED,PSII&USB keyboard, mouse). OSD switch Support.	
Panel	Size	19" TFT LED
	Resolution	1024*1280 (1920*1080 optional)
	Max Color	16.7M
	Brightness	300nit
	Contrast ratio	700:1
	Pixel Pitch	0.297mm (H) x 0.297 mm(V)
Power input	12V DC input (AC100-240V 47-63Hz, 35W)optional	
Work environment	Operating Temp	-10℃~60℃
	Storage Temp	-20℃~70℃
	Humidity	0%-95%RH
Cabinet Material	high-strength and Anti-corrosive steel plate	
Color	Insulated black(optional)	
For Cabinet	600-600mm / 800-1040mm	
Net weight	16KG	
Gross Weight	20KG	
Dimension	481.6mm*450mm*44mm (L x W x H)	
Package	708mm*608mm*195mm (L x W x H)	
Certificate	CE , FCC , RHOS	


Ordering information

KVM- 1901S	1U Rack mount 19" TFT LED W/1 VGA port KVM switch, W/ 12V power supply, W/PSII&USB cable.
-------------------	---

IO view:



Drawing:

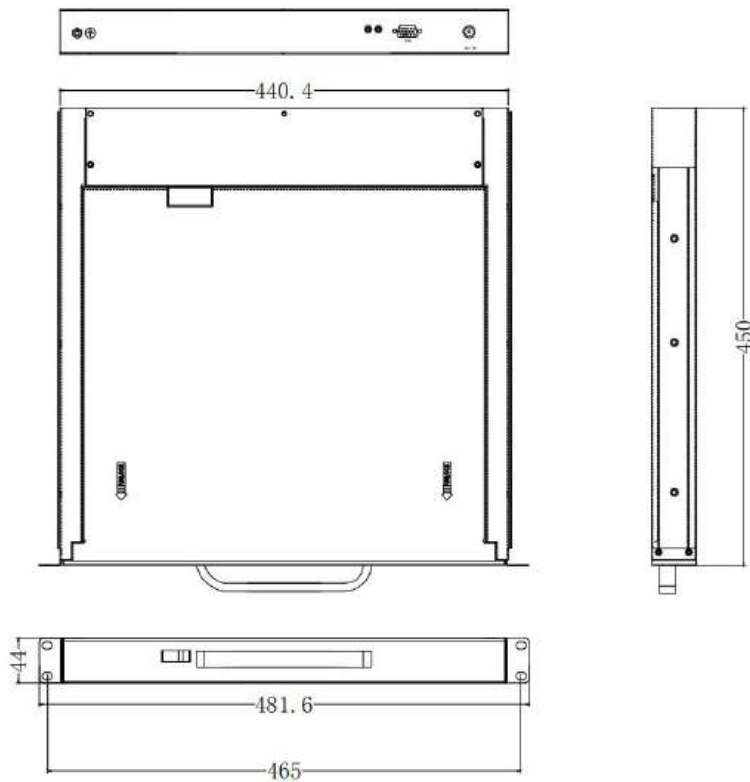



KVM-21500M series

4ports/8ports/16ports 1U rack mount 21.5" LED KVM drawer



Main features

- « 19" 1U rack mount 21.5" LED KVM switch with touch pad+Mouse
- « 104keys keyboard with integrated Digital&E-switch keys.
- « Supports 1920*1080 resolution, 300nit brightness.
- « Supports front USB for keyboard/mouse
- « Support USB+PS2 local console
- « Supports computer indicator when user switch to another computer.
- « Support cascading connection, max up to 512 computer.

Introduction

- « Withdrawing installation design, the length can be adjusted to fit the rack space.
- « Humanized design, can be installed and removed by only one person , which improves the efficiency of the administrator.
- « To switch the host computer though the hotkey or OSD menu, which can manage up to 512 computers.
- « Password security protection, only authorized users can view and manage on-line

computer.

« Support a variety of brand industrial computer and the sever, eg: EVOC / Lenovo / IBM / DELL / HP/ SUN, etc.

« Support various operating system: Window XP, 7 / 8 / 10, Microsoft, Linux, Unix etc.

Specification

Model	KVM-21504M	KVM - 21508M	KVM-21516M
Computer connect	Direct 4	Direct 8	Direct 16
	Max: 128	Max : 256	Max: 512
Keyboard	104 Mechanical mute Keyboard		
Mouse	Touchpad		
Switch Mode	Hotkey , OSD Menu		
Switch Scan Time	1-255 second （ OSD adjustable ）		
Cable Port	Local console	Keyboard / Mouse/ Display (2*USB +2*PS/2+1* HDB-15 female ）	
	Connector port	8 /16 * HDB-15 female (Yellow)	
	Power supply	1 * 3 pin AC power supply socket	
Panel	Size	21.5” TFT LED	
	Resolution	1920 * 1080	
	Max Color	16.7M	
	Brightness	300nit	
	Contrast ratio	700:1	
	Pixel Pitch	0.297 x 0.297 mm	
Power input	12V DC input (AC100-240V 47-63Hz, 35W)optional		
Work environment	Operating Temp	-10℃~60℃	
	Storage Temp	-20℃~70℃	
	Humidity	0%-95%RH	
Cabinet Material	high-strength and Anti-corrosive steel plate		
Color	Insulated black (optional)		
For Cabinet	800-1040mm		
Net weight	16KG-18KG		
Gross Weight	19KG-23KG		

Dimension(Lx W x H)	689mm*440.4mm*44mm
Package (L x W x H)	871mm*608mm*195mm
Certificate	CE , FCC , RHOS


Ordering information

KVM -21504M	1U Rack mount 21.5 " TFT LCD KVM switch, W/ keyboard +touchpad , W/ 4 port VGA , W/ 12V power supply, W/ USB cable.
KVM-21508M	1U Rack mount 21.5 " TFT LCD KVM switch, W/ keyboard +touchpad , W/ 8 port VGA , W/ 12V power supply, W/ USB cable.
KVM-21516M	1U Rack mount 21.5 " TFT LCD KVM switch, W/ keyboard +touchpad , W/ 16 port VGA , W/ 12V power supply, W/ USB cable.


IO View



Drawing

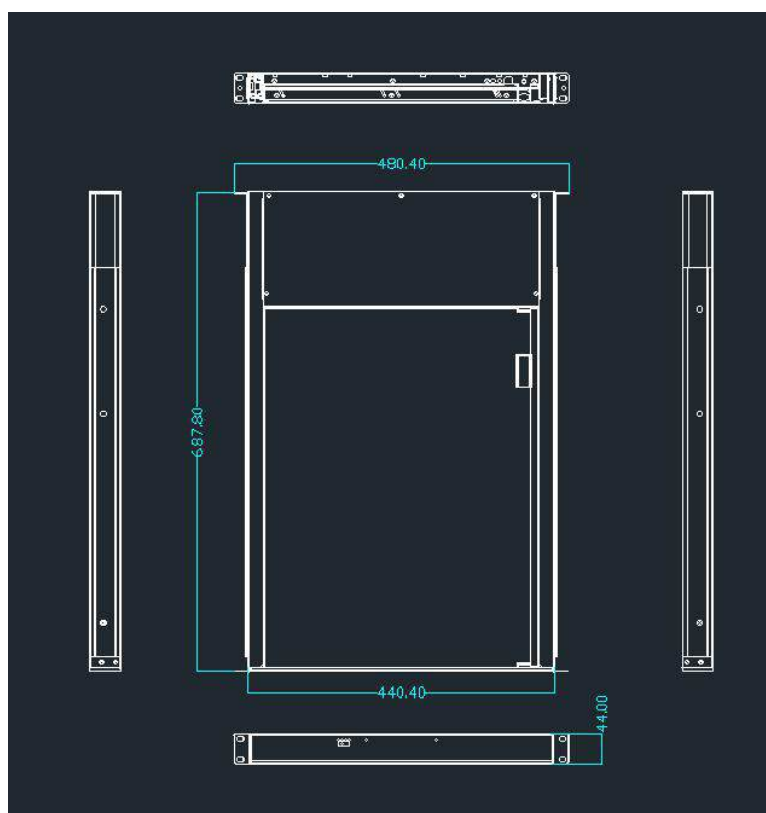

Packing details

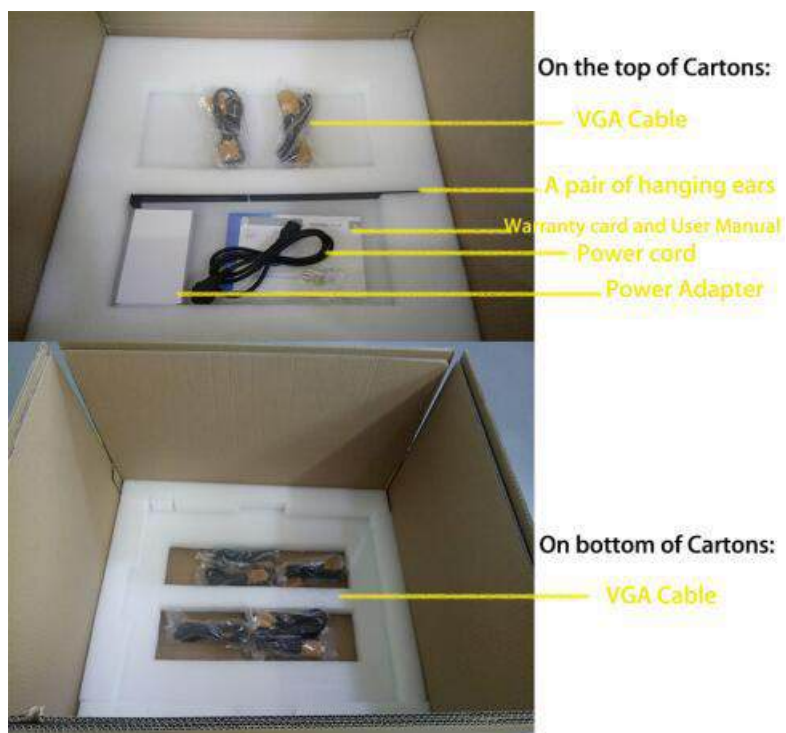



KVM-1700Cseries

CAT5 8ports/16ports/ 32ports 1U rack mount 17" LED KVM drawer



Main features

- « 19" 1U rack mount 17" LED KVM switch with touch pad+Mouse +104keys keyboard with integrated Digital&E-switch keys.
- « Supports front USB for keyboard/mouse
- « Support USB+PS2 local console
- « Excellent video effects, the best resolution is up to 1280*1024@ 75HZ.
- « Using RJ-45 interface, the CAT5/ CAT5E/CAT6 UTP cable are connected to the host computer ,control distance is up to 20M.
- « With 21 electronic al gain adjustment, it can avoid signal attenuation cause by distance problem .

Introduction

- « Withdrawing installation design, the length can be adjusted to fit the rack space.
- « Humanized design, can be installed and removed by only one person , which improves

the efficiency of the administrator.

« To switch the host computer through the hotkey or OSD menu, which can manage up to 1024 computers.

« Password security protection, only authorized users can view and manage on-line computer.

« Support a variety of brand industrial computer and the server, eg: EVOC / Lenovo / IBM / DELL / HP/ SUN, etc .

« Support various operating system: Window XP, 7 / 8 / 10 ,Microsoft, Linux, Unix,etc.

Specification

Model	KVM-1708C	KVM-1716C	KVM-1732C
Computer connect	Direct : 8	Direct : 16	Direct : 32
	Max : 256	Max : 512	Max : 1024
Keyboard	104 Mechanical mute Keyboard		
Mouse	Touchpad		
Switch Mode	Hotkey , OSD Menu		
Switch Scan Time	1-255 second （ OSD adjustable ）		
Cable Port (CAT5 connected network cable is up to 200M)	Local console	Keyboard / Mouse/ Display (2*USB +1* HDB-15 female)	
	Connector port	8 /16 / 32 * CAT5 (RJ45 port)	
	Power supply	1 * 3 pin AC power supply socket	
Panel	Size	17” TFT LED	
	Resolution	1024 * 1280 @75HZ	
	Max Color	16.2M	
	Brightness	300nit	
	Contrast ratio	700:1	
	Pixel Pitch	0.297 x 0.297 mm	
Work environment	Operating Temp	-10℃~60℃	
	Storage Temp	-20℃~70℃	
	Humidity	0%-95%RH	
Power input	DC12V input , (AC100-240V 47-63Hz, 35W) optional		
Cabinet Material	high-strength and Anti-corrosive steel plate		
Color	Insulated black (optional)		
For Cabinet	800-1040mm		
Net weight	12KG-16KG		

Gross Weight	16kG-21KG
Dimension(Lx W x H)	567.4*480.4*44mm
Package (L x W x H)	708*608*195mm
Certificate	CE , FCC , RHOS


Ordering information

KVM - 1708C	1U Rack mount 17" TFT LED KVM switch, W/ 8 RJ45 port , W/ 12V power supply.
KVM - 1716C	1U Rack mount 17" TFT LED KVM switch, W/ 16 RJ45 port , W/12V power supply,
KVM-1732C	1U Rack mount 17" TFT LED KVM switch, W/ 32 RJ45 port , W/ 12V power supply.

IO View :



Drawing

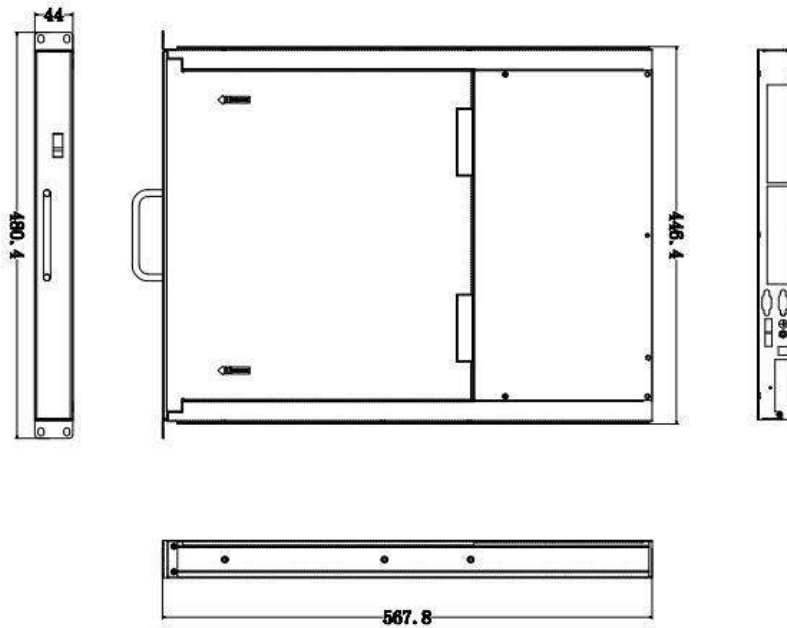

Accessories



On the top of Cartons:

Power Cord

Power Adapter

Warranty Card and User Manual

A pair of hanging ears

USB Dongle

On Bottom of Cartons :

USB Dongle



KVM-1700HCCseries

CAT5 8ports/16ports/ 32ports 1U rack mount 17.3" LED KVM drawer



Main features

- « 1U rack mount 17.3" LED KVM switch with touch pad+Mouse +99keys keyboard with integrated Digital&E-switch keys.
- « Supports front USB for keyboard/mouse
- « Support USB+VGA local console
- « Excellent video effects, the best resolution is up to 1920*1080@ 75HZ.
- « Using RJ-45 interface, the CAT5/ CAT5E/CAT6 UTP cable are connected to the host computer ,control distance is up to 20M.
- « With 21 electronic al gain adjustment, it can avoid signal attenuation cause by distance problem .

Introduction

- « Withdrawing installation design, the length can be adjusted to fit the rack space.
- « Humanized design, can be installed and removed by only one person , which improves the efficiency of the administrator.
- « To switch the host computer though the hotkey or OSD menu, which can manage up to 1024 computers.

- « Password security protection, only authorized users can view and manage on-line computer.
- « Support a variety of brand industrial computer and the sever, eg: EVOC / Lenovo / IBM / DELL / HP/ SUN, ect .
- « Support various operating system: Window XP, 7 / 8 / 10 ,Microsoft, Linux, Unix,etc.

Specification

Model	KVM-1708HC	KVM-1716HC	KVM-1732HC
Computer connect	Direct : 8	Direct : 16	Direct : 32
	Max : 256	Max : 512	Max : 1024
Keyboard	99 Mechanical mute Keyboard		
Mouse	Touchpad		
Switch Mode	Hotkey , OSD Menu		
Switch Scan Time	1-255 second (OSD adjustable)		
Cable Port (CAT5 connected network cable is up to 200M)	Local console	Keyboard / Mouse/ Display (2*USB+1* HDB-15 female)	
	Connector port	8 /16 / 32 * CAT5 (RJ45 port)	
	Power supply	1 * 3 pin AC power supply socket	
Panel	Size	17.3” TFT LED	
	Resolution	1920 * 1080	
	Max Color	262K	
	Brightness	300nit	
	Contrast ratio	400:1	
	Pixel Pitch	0.17925mm (H) x 0.17925 mm(V)	
Work environment	Operating Temp	-10℃~60℃	
	Storage Temp	-20℃~70℃	
	Humidity	0%-95%RH	
Power input	DC12V input , (AC100-240V 47-63Hz, 35W) optional		
Cabinet Material	high-strength and Anti-corrosive steel plate		
Color	Insulated black (optional)		
For Cabinet	600-600mm / 800-1040mm		
Net weight	13KG-17KG		
Gross Weight	17kG-20KG		
Dimension(Lx Wx H)	480mm*480.4mm*44mm (L x W x H)		
Package (L x W x H)	738mm*608mm*195mm		
Certificate	CE , FCC , RHOS		


Ordering information

KVM - 1708HC	1U Rack mount 17.3" TFT LED KVM switch, W/ 8 RJ45 port , W/ 12V power supply.
KVM - 1716HC	1U Rack mount 17.3" TFT LED KVM switch, W/ 16 RJ45 port , W/12V power supply,
KVM-1732HC	1U Rack mount 17.3" TFT LED KVM switch, W/ 32 RJ45 port , W/ 12V power supply.

IO View



Drawing

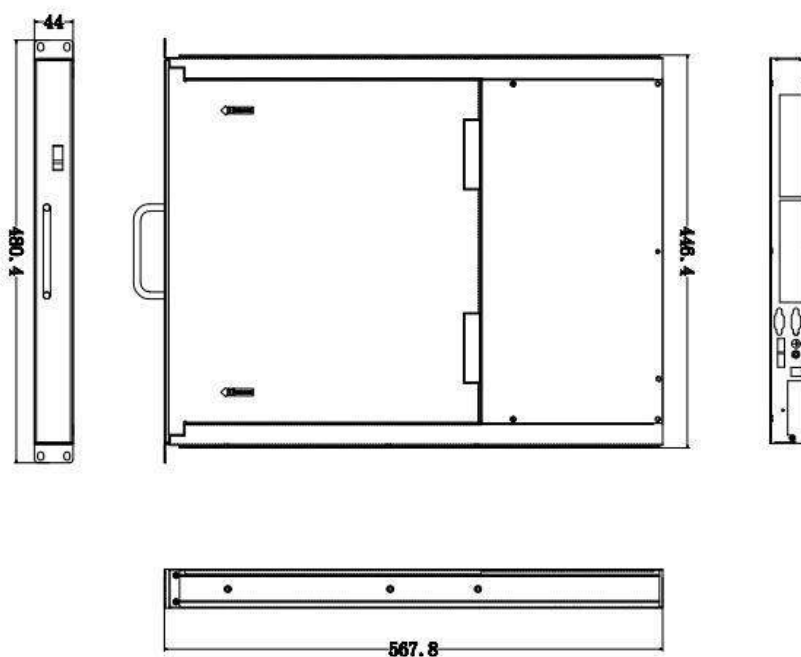

Accessories



On the top of Cartons:

Power Cord

Power Adapter

Warranty Card and User Manual

A pair of hanging ears

USB Dongle

On Bottom of Cartons :

USB Dongle



KVM-1800HCseries

CAT5 8ports/16ports/ 32ports 1U rack mount 18.5" LED KVM drawer



Main features

- « 1U rack mount 18.5" LED KVM switch with touch pad+Mouse +99keys keyboard with integrated Digital&E-switch keys.
- « Supports front USB for keyboard/mouse
- « Support USB+VGA local console
- « Excellent video effects, the best resolution is up to 1920*1080@ 75HZ.
- « Using RJ-45 interface, the CAT5/ CAT5E/CAT6 UTP cable are connected to the host computer ,control distance is up to 20M.
- « With 21 electronic al gain adjustment, it can avoid signal attenuation cause by distance problem .

Introduction

- « Withdrawing installation design, the length can be adjusted to fit the rack space.
- « Humanized design, can be installed and removed by only one person , which improves the efficiency of the administrator.
- « To switch the host computer though the hotkey or OSD menu, which can manage up to 1024 computers.

- « Password security protection, only authorized users can view and manage on-line computer.
- « Support a variety of brand industrial computer and the sever, eg: EVOC / Lenovo / IBM / DELL / HP/ SUN, ect .
- « Support various operating system: Window XP, 7 /8 / 10 ,Microsoft, Linux, Unix,etc.

Specification

Model	KVM-1808HC	KVM-1816HC	KVM-1832HC
Computer connect	Direct : 8	Direct : 16	Direct : 32
	Max : 256	Max : 512	Max : 1024
Keyboard	99 Mechanical mute Keyboard		
Mouse	Touchpad		
Switch Mode	Hotkey , OSD Menu		
Switch Scan Time	1-255 second (OSD adjustable)		
Cable Port (CAT5 connected network cable is up to 200M)	Local console	Keyboard / Mouse/ Display (2*USB+1* HDB-15 female)	
	Connector port	8 /16 / 32 * CAT5 (RJ45 port)	
	Power supply	1 * 3 pin AC power supply socket	
Panel	Size	18.5'' TFT LED	
	Resolution	1920 * 1080	
	Max Color	262K	
	Brightness	300nit	
	Contrast ratio	400:1	
	Pixel Pitch	0.17925mm (H) x 0.17925 mm(V)	
Work environment	Operating Temp	-10℃~60℃	
	Storage Temp	-20℃~70℃	
	Humidity	0%-95%RH	
Power input	DC12V input , (AC100-240V 47-63Hz, 35W) optional		
Cabinet Material	high-strength and Anti-corrosive steel plate		
Color	Insulated black (optional)		
For Cabinet	800-1040mm		
Net weight	14KG-17KG		
Gross Weight	16kG-20KG		
Dimension(Lx Wx H)	567.4mm*500mm*44mm		
Package (L x W x H)	738mm*608mm*195mm		

Certificate	CE , FCC , RHOS
--------------------	-----------------


Ordering information

KVM - 1808HC	1U Rack mount 18.5" TFT LED KVM switch, W/ 8 RJ45 port , W/ 12V power supply.
KVM - 1816HC	1U Rack mount 18.5" TFT LED KVM switch, W/ 16 RJ45 port , W/12V power supply,
KVM-1832HC	1U Rack mount 18.5" TFT LED KVM switch, W/ 32 RJ45 port , W/ 12V power supply.

IO View



Drawing

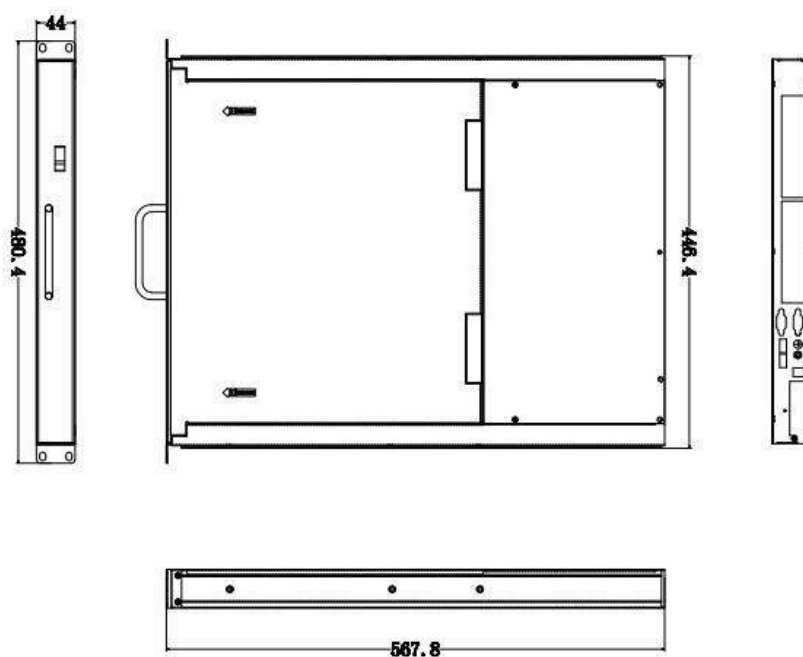

Accessories



On the top of Cartons:

Power Cord

Power Adapter

Warranty Card and User Manual

A pair of hanging ears

USB Dongle

On Bottom of Cartons :

USB Dongle

KVM-1800Cseries

CAT5 8ports/16ports/ 32ports 1U rack mount 18.5" LED KVM drawer



Main features

- « 19" 1U rack mount 18.5" LED KVM switch with touch pad+Mouse +99keys keyboard with integrated Digital&E-switch keys.
- « Supports front USB for keyboard/mouse
- « Support USB+VGA local console
- « Excellent video effects, the resolution is 1366*768.
- « Using RJ-45 interface, the CAT5/ CAT5E/CAT6 UTP cable are connected to the host computer ,control distance is up to 20M.
- « With 21 electronic al gain adjustment, it can avoid signal attenuation cause by distance problem .

Introduction

- « Withdrawing installation design, the length can be adjusted to fit the rack space.
- « Humanized design, can be installed and removed by only one person , which improves the efficiency of the administrator.
- « To switch the host computer though the hotkey or OSD menu, which can manage up to 1024 computers.

- « Password security protection, only authorized users can view and manage on-line computer.
- « Support a variety of brand industrial computer and the sever, eg: EVOC / Lenovo / IBM / DELL / HP/ SUN, ect .
- « Support various operating system: Window XP, 7 /8 / 10 ,Microsoft, Linux, Unix,etc.

Specification

Model	KVM-1808C	KVM-1816C	KVM-1832C
Computer connect	Direct : 8	Direct : 16	Direct : 32
	Max : 256	Max : 512	Max : 1024
Keyboard	99 Mechanical mute Keyboard		
Mouse	Touchpad		
Switch Mode	Hotkey , OSD Menu		
Switch Scan Time	1-255 second (OSD adjustable)		
Cable Port (CAT5 connected network cable is up to 200M)	Local console	Keyboard / Mouse/ Display (2*USB+1* HDB-15 female)	
	Connector port	8 /16 / 32 * CAT5 (RJ45 port)	
	Power supply	1 * 3 pin AC power supply socket	
Panel	Size	18.5” TFT LED	
	Resolution	1366*768	
	Max Color	16.2M	
	Brightness	300nit	
	Contrast ratio	700:1	
	Pixel Pitch	0.297 x 0.297 mm	
Work environment	Operating Temp	-10℃~60℃	
	Storage Temp	-20℃~70℃	
	Humidity	0%-95%RH	
Power input	DC12V input , (AC100-240V 47-63Hz, 35W) optional		
Cabinet Material	high-strength and Anti-corrosive steel plate		
Color	Insulated black (optional)		
For Cabinet	800-1040mm		
Net weight	12KG		
Gross Weight	16kG		
Dimension(Lx Wx H)	567.4mm*480.4mm*44mm		
Package (L x W x H)	738mm*608mm*195mm		
Certificate	CE , FCC , RHOS		


Ordering information

KVM - 1808C	1U Rack mount 18.5" TFT LED KVM switch, W/ 8 RJ45 port , W/ 12V power supply.
KVM - 1816C	1U Rack mount 18.5" TFT LED KVM switch, W/ 16 RJ45 port , W/12V power supply,
KVM-1832C	1U Rack mount 18.5" TFT LED KVM switch, W/ 32 RJ45 port , W/ 12V power supply.

IO View



Drawing

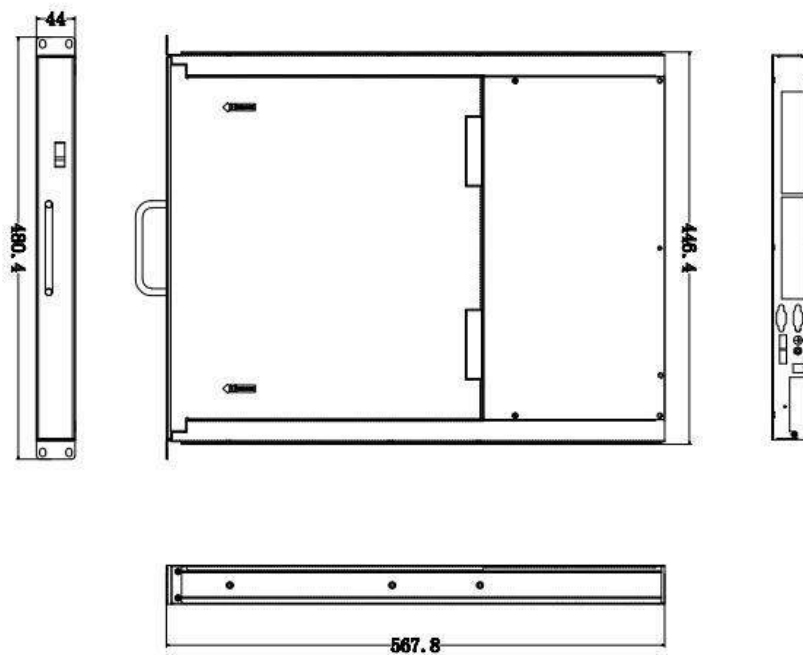

Accessories



On the top of Cartons:

Power Cord

Power Adapter

Warranty Card and User Manual

A pair of hanging ears

USB Dongle

On Bottom of Cartons :

USB Dongle

KVM-1900Cseries

CAT5 8ports/16ports/ 32ports 1U rack mount 19" LED KVM drawer



Main features

- « 19" 1U rack mount 19" LED KVM switch with touch pad+Mouse +104keys keyboard with integrated Digital&E-switch keys.
- « Supports front USB for keyboard/mouse
- « Support USB+PS2 local console
- « Excellent video effects, the best resolution is up to 1280*1024@ 75HZ.
- « Using RJ-45 interface, the CAT5/ CAT5E/CAT6 UTP cable are connected to the host computer ,control distance is up to 20M.
- « With 21 electronic al gain adjustment, it can avoid signal attenuation cause by distance problem .

Introduction

- « Withdrawing installation design, the length can be adjusted to fit the rack space.
- « Humanized design, can be installed and removed by only one person , which improves the efficiency of the administrator.

- « To switch the host computer through the hotkey or OSD menu, which can manage up to 1024 computers.
- « Password security protection, only authorized users can view and manage on-line computer.
- « Support a variety of brand industrial computer and the sever, eg: EVOC / Lenovo / IBM / DELL / HP/ SUN, ect .
- « Support various operating system: Window XP, 7 /8 / 10 ,Microsoft, Linux, Unix,etc.

Specification

Model	KVM-1908C	KVM-1916C	KVM-1932C
Computer connect	Direct : 8	Direct : 16	Direct : 32
	Max : 256	Max : 512	Max : 1024
Keyboard	104 Mechanical mute Keyboard		
Mouse	Touchpad		
Switch Mode	Hotkey , OSD Menu		
Switch Scan Time	1-255 second （ OSD adjustable ）		
Cable Port (CAT5 connected network cable is up to 200M)	Local console	Keyboard / Mouse/ Display (2*USB +2*PS/2+1* HDB-15 female)	
	Connector port	8 /16 / 32 * CAT5 (RJ45 port)	
	Power supply	1 * 3 pin AC power supply socket	
Panel	Size	19” TFT LED	
	Resolution	1024 * 1280 @75HZ	
	Max Color	16.2M	
	Brightness	300nit	
	Contrast ratio	700:1	
	Pixel Pitch	0.297 x 0.297 mm	
Work environment	Operating Temp	-10℃~60℃	
	Storage Temp	-20℃~70℃	
	Humidity	0%-95%RH	
Power input	DC12V input , (AC100-240V 47-63Hz, 35W) optional		
Cabinet Material	high-strength and Anti-corrosive steel plate		
Color	Insulated black (optional)		
For Cabinet	800-1040mm		
Net weight	12KG		
Gross Weight	16kG		
Dimension(Lx Wx H)	600mm*480mm*44mm		

Package (L x W x H)	738mm*608mm*195mm
Certificate	CE , FCC , RHOS


Ordering information

KVM - 1908C	1U Rack mount 19" TFT LED KVM switch, W/ 8 RJ45 port , W/ 12V power supply.
KVM - 1916C	1U Rack mount 19" TFT LED KVM switch, W/ 16 RJ45 port , W/12V power supply,
KVM-1932C	1U Rack mount 19" TFT LED KVM switch, W/ 32 RJ45 port , W/ 12V power supply.

IO View



Drawing

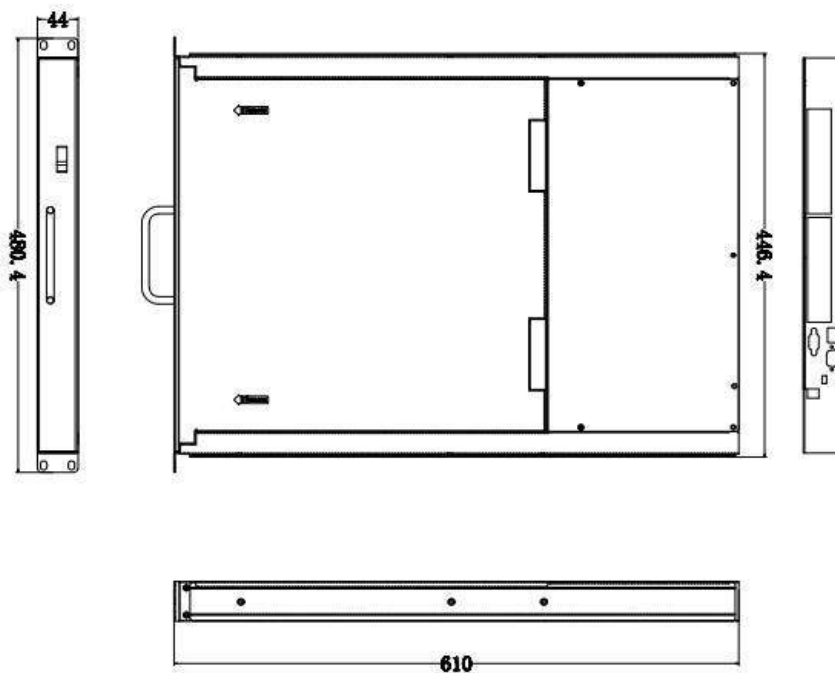

Accessories



On the top of Cartons:

Power Cord

Power Adapter

Warranty Card and User Manual

A pair of hanging ears

USB Dongle

On Bottom of Cartons :

USB Dongle

KVM-1500HM series

1 port /4ports /8ports /16ports 1U rack mount 15.6" LED KVM drawer



Main features

- « 15.6" LED KVM switch with touch pad+Mouse
- « 104keys keyboard with integrated Digital&E-switch keys.
- « Excellent video effects, the best resolution is up to 1920*1080@ 75HZ.
- « Supports front USB for keyboard/mouse
- « Support USB+PS2 local console
- « Supports computer indicator when user switch to another computer.
- « Support cascading connection, max up to 512 computer.

Introduction

- « Withdrawing installation design, the length can be adjusted to fit the rack space.
- « Humanized design, can be installed and removed by only one person , which improves the efficiency of the administrator.
- « To switch the host computer though the hotkey or OSD menu, which can manage up to

512 computers.

« Password security protection, only authorized users can view and manage on-line computer.

« Support a variety of brand industrial computer and the sever, eg: EVOC / Lenovo / IBM / DELL / HP/ SUN, ect .

« Support various operating system: Window XP, 7 /8 / 10 ,Microsoft, Linux, Unix,etc.

Specification


Model	KVM-1501HM	KVM-1504HM	KVM-1508HM	KVM-1516HM
Computer connect	Direct 1	Direct 4	Direct 8	Direct 16
	Max:1	Max : 128	Max : 256	Max: 512
Keyboard	104 Mechanical mute Keyboard			
Mouse	Touchpad			
Switch Mode	Hotkey , OSD Menu			
Switch Scan Time	1-255 second (OSD adjustable)			
Cable Port	Local console	Keyboard / Mouse/ Display (2*USB +2*PS/2+1* HDB-15 female)		
	Connector port	1/ 4 / 8 /16 * HDB-15 female (Yellow)		
	Input IO	HDMI+DVI (optional) for 1 port		
Panel	Size	15.6 '' TFT LED , 16:9		
	Resolution	1920 * 1080		
	Max Color	262K		
	Brightness	300nit		
	Contrast ratio	400:1		
	Pixel Pitch	0.17925mm (H) x 0.17925 mm(V)		
Power input	12V DC input (AC100-240V 47-63Hz, 35W)optional			
Work environment	Operating Temp	-10℃~60℃		
	Storage Temp	-20℃~70℃		
	Humidity	0%-95%RH		
Cabinet Material	high-strength and Anti-corrosive steel plate			
Color	Insulated black (optional)			
For Cabinet	600-600mm / 800-1040mm			
Net weight	13KG-16KG			
Gross Weight	16KG~19KG			
Dimension	465mm*480.4mm*44mm (L x W x H)			
Package	708mm*608mm*195mm (L x W x H)			

Certificate	CE , FCC , RHOS
--------------------	-----------------

Ordering information

KVM - 1501HM	1U Rack mount 15.6" TFT LCD KVM switch, W/ keyboard +touchpad , W/ 1 port VGA , W/ HDMI + DVI,W/ 12V power supply, W/ USB cable.
KVM - 1504HM	1U Rack mount 15.6" TFT LCD KVM switch, W/ keyboard +touchpad , W/ 4 port VGA , W/ 12V power supply, W/ USB cable.
KVM - 1508HM	1U Rack mount 15.6" TFT LCD KVM switch, W/ keyboard +touchpad , W/ 8 port VGA , W/ 12V power supply, W/ USB cable.
KVM - 1516HM	1U Rack mount 15.6" TFT LCD KVM switch, W/ keyboard +touchpad , W/ 16 port VGA , W/ 12V power supply, W/ USB cable.

Drawing

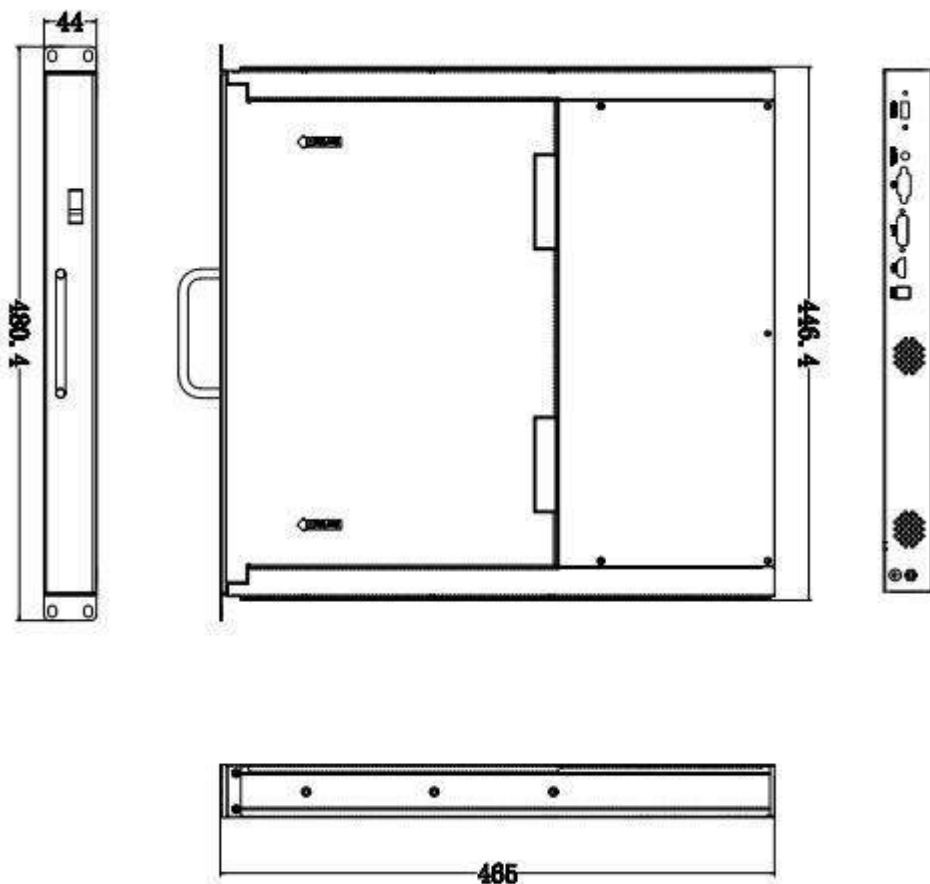

KVM-1700HM series

1port /4ports /8ports /16ports 1U rack mount 17.3" LED KVM drawer



Main features

- « 17.3" LED KVM switch with touch pad+Mouse
- « 104keys keyboard with integrated Digital&E-switch keys.
- « Excellent video effects, the best resolution is up to 1920*1080@ 75HZ.
- « Supports front USB for keyboard/mouse
- « Support USB+PS2 local console
- « Supports computer indicator when user switch to another computer.
- « Support cascading connection, max up to 512 computer.

Introduction

- « Withdrawing installation design, the length can be adjusted to fit the rack space.
- « Humanized design, can be installed and removed by only one person , which improves the efficiency of the administrator.
- « To switch the host computer though the hotkey or OSD menu, which can manage up to 512 computers.

- « Password security protection, only authorized users can view and manage on-line computer.
- « Support a variety of brand industrial computer and the sever, eg: EVOC / Lenovo / IBM / DELL / HP/ SUN, ect .
- « Support various operating system: Window XP, 7 /8 / 10 ,Microsoft, Linux, Unix,etc.

Specification


Model	KVM-1701HM	KVM-1704HM	KVM-1708HM	KVM-1716HM
Computer connect	Direct 1	Direct 4	Direct 8	Direct 16
	Max:1	Max : 128	Max : 256	Max: 512
Keyboard	104 Mechanical mute Keyboard			
Mouse	Touchpad			
Switch Mode	Hotkey , OSD Menu			
Switch Scan Time	1-255 second (OSD adjustable)			
Cable Port	Local console	Keyboard / Mouse/ Display (2*USB +2*PS/2+1* HDB-15 female)		
	Connector port	1/ 4 / 8 /16 * HDB-15 female (Yellow)		
	Input IO	HDMI+DVI (optional) for 1 port		
Panel	Size	17.3 '' TFT LED , 16:9		
	Resolution	1920 * 1080		
	Max Color	262K		
	Brightness	300nit		
	Contrast ratio	400:1		
	Pixel Pitch	0.17925mm (H) x 0.17925 mm(V)		
Power input	12V DC input (AC100-240V 47-63Hz, 35W)optional			
Work environment	Operating Temp	-10℃~60℃		
	Storage Temp	-20℃~70℃		
	Humidity	0%-95%RH		
Cabinet Material	high-strength and Anti-corrosive steel plate			
Color	Insulated black(optional)			
For Cabinet	600-600mm / 800-1040mm			
Net weight	13KG-17KG			
Gross Weight	17KG~20KG			
Dimension	480mm*480.4mm*44mm (L x W x H)			
Package	708mm*608mm*195mm (L x W x H)			

Certificate	CE , FCC , RHOS
--------------------	-----------------

Ordering information

KVM - 1701HM	1U Rack mount 17.3" TFT LCD KVM switch, W/ keyboard +touchpad , W/ 1 port VGA , W/ HDMI + DVI,W/ 12V power supply, W/ USB cable.
KVM - 1704HM	1U Rack mount 17.3" TFT LCD KVM switch, W/ keyboard +touchpad , W/ 4 port VGA , W/ 12V power supply, W/ USB cable.
KVM - 1708HM	1U Rack mount 17.3" TFT LCD KVM switch, W/ keyboard +touchpad , W/ 8 port VGA ,W/ 12V power supply, W/ USB cable.
KVM - 1716HM	1U Rack mount 17.3" TFT LCD KVM switch, W/ keyboard +touchpad , W/ 16 port VGA , W/ 12V power supply, W/ USB cable.

Drawing

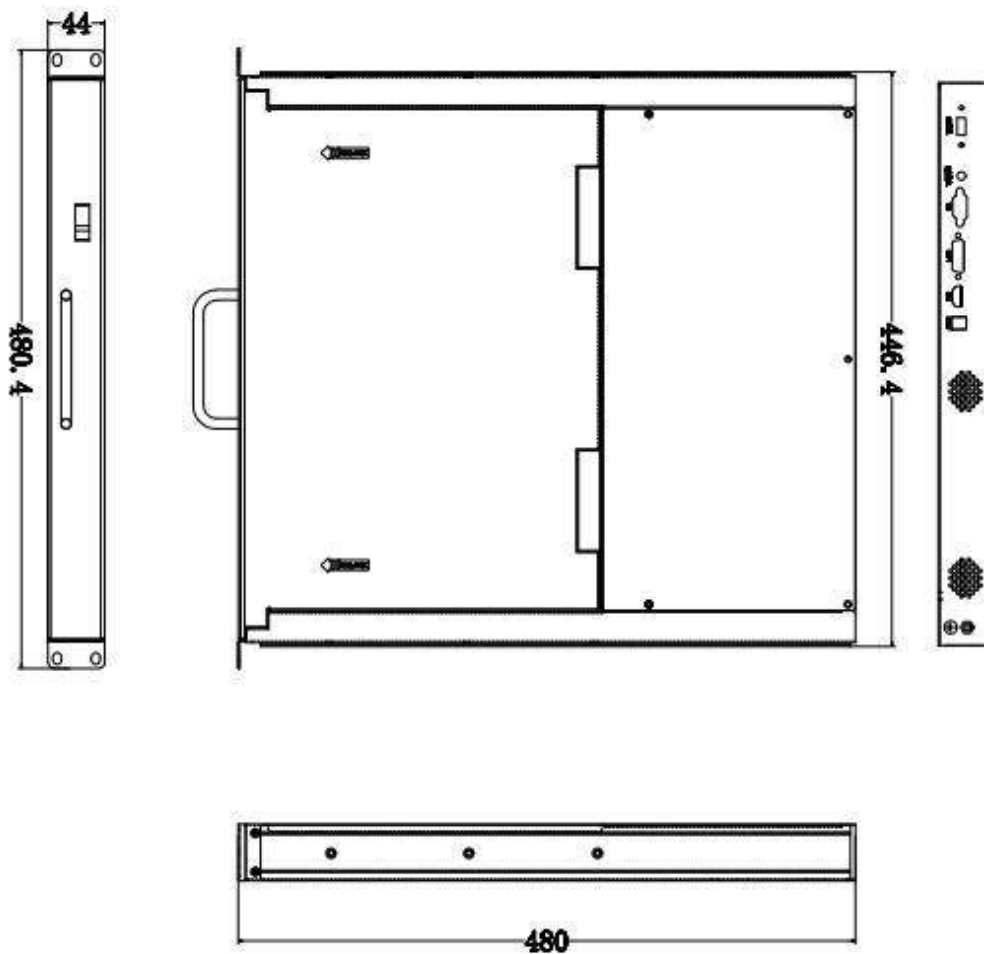

KVM-1800M series

1port/4ports/ 8ports/16ports 1U rack mount 18.5" LED KVM drawer



Main features

- « 1U rack mount 18.5" LED KVM switch with touch pad+Mouse +104 Mechanical mute Keyboard
- « Supports front USB for keyboard/mouse
- « Support USB+VGA local console
- « Excellent video effects, the best resolution is up to 1920*1080@ 75HZ.
- « PS/2 keyboard and mouse are connected to control computer.

Introduction

- « Withdrawing installation design, the length can be adjusted to fit the rack space.
- « Humanized design, can be installed and removed by only one person , which improves the efficiency of the administrator.
- « To switch the host computer though the hotkey or OSD menu, which can manage up to 512 computers.
- « Password security protection, only authorized users can view and manage on-line computer.
- « Support a variety of brand industrial computer and the sever, eg: EVOC / Lenovo / IBM / DELL / HP/ SUN, ect .
- « Support various operating system: Window XP, 7 /8 / 10 ,Microsoft, Linux, Unix,etc.

Specification

Model	KVM-1801M	KVM-1804M	KVM-1808M	KVM-1816M
Computer connect	Direct 1	Direct 4	Direct 8	Direct 16
	Max:1	Max : 128	Max : 256	Max: 512
Keyboard	104 Mechanical mute Keyboard			
Mouse	Touchpad			
Switch Mode	Hotkey , OSD Menu			
Switch Scan Time	1-255 second （ OSD adjustable ）			
Cable Port	Local console	Keyboard / Mouse/ Display (2*USB +2*PS/2+1* HDB-15 female ）		
	Connector port	1/ 4 / 8 /16 * HDB-15 female (Yellow)		
	Power supply	1 * 3 pin AC power supply socket		
Panel	Size	18"5 TFT LED		
	Resolution	1366*768 (1920*1080 optional)		
	Max Color	16.7M		
	Brightness	250nit		
	Contrast ratio	1000:1		
	Pixel Pitch	0.3 x 0.3 mm		
Power input	12V DC input (AC100-240V 47-63Hz, 35W)optional			
Work environment	Operating Temp	-10℃~60℃		
	Storage Temp	-20℃~70℃		
	Humidity	0%-95%RH		
Cabinet Material	high-strength and Anti-corrosive steel plate			
Color	Insulated black (optional)			
For Cabinet	800-1040mm			
Net weight	13KG-17KG			
Gross Weight	17KG-22KG			
Dimension(Lx W x H)	530mm*481.6mm*44mm			
Package (L x W x H)	708mm*608mm*195mm			
Certificate	CE , FCC , RHOS			


Ordering information

KVM - 1801M	1U Rack mount 18.5" TFT LED W/1 port KVM switch, W/ 12V power supply, W/PSII&USB cable.
KVM - 1804M	1U Rack mount 18.5" TFT LED W/4 port KVM switch, W/12V power supply, W/PSII&USB cable.
KVM-1808M	1U Rack mount 18.5" TFT LED W/8 port KVM switch, W/ 12V power supply, W/PSII&USB cable.
KVM-1816M	1U Rack mount 18.5" TFT LED W/16 port KVM switch, W/ 12V power supply, W/PSII&USB cable.

IO View



Drawing

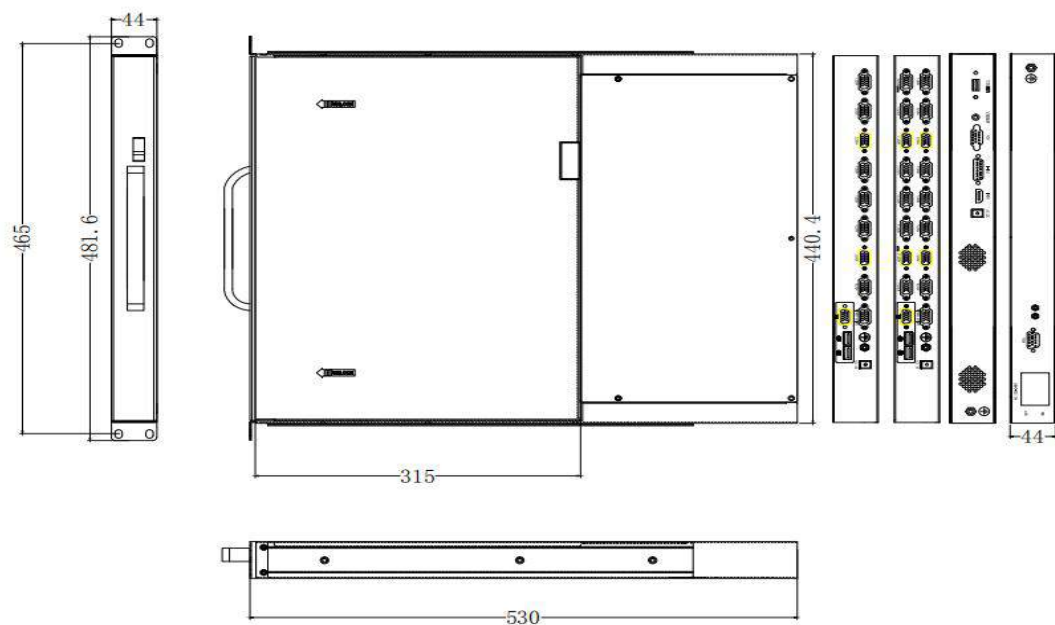

IP KVM-1500M series

8ports/16ports 1U rack mount 15" LED KVM drawer over IP



Main features

- « KVM (keyboard, video ,mouse) access over IP and analogous telephone line (modem needed) .
- « Full control under any OS, in BIOS mode , during boot, at Blue Screen
- « 256 bit SSL encryption of all transmitted data and certificate management
- « Port to connect a user console for direct analogous access to KVM switch
- « Can be used with most standard KVM
- « To switch the host computer though the hotkey or OSD menu, which can manage up to 512 computers.
- « Password security protection, only authorized users can view and manage on-line computer.
- « Support a variety of brand industrial computer and the server:

EVOC/Lenovo/IBM/DELL/HP/SUN, etc

« Support various operating system: Microsoft, Linux, Unix, etc.

Introduction

« IP-KVM switch can save your Money ,Time, Space, Equipment and Power . IP KVM switch defines a new class of remote KVM switch devices. IP KVM switch combines digital remote KVM access via IP networks with comprehensive and integrated system management.

« IP KVM Switch provides convenient, remote KVM access and control via LAN or internet . it captures, digitizes, and compresses video signal and transmits it with keyboard and mouse signals to and from a remote computer. IP KVM switch provides a non-intrusive solution for remote access and control . Remote access and control software runs on its embedded processors only but not on mission-critical servers, so that there is no interference with server operation or impact on network performance.

Specification

Model	IP KVM-1508M	IP KVM-1516M
Computer connect	Direct : 8	Direct : 16
	Max : 256	Max : 512
Connector port	8 /16 * HDB-15 female (Yellow)	
IP Module console	1* RJ45 port , 1* VGA port (male) , 1* USB	
Selection connection	Support daisy-chained serial connection(8 levels) and stacking cascade connection (2 levels).	
Keyboard	104 Mechanical mute Keyboard	
Mouse	Touchpad	
Switch Mode	Hotkey , OSD Menu	
Auto scanning interval	5 - 99 second	
Power input	DC12V input , (AC100-240V 47-63Hz, 35W) optional	
LED Indicator	Power indicator	2
	Selection indicator	16
	Boost on-line indicator	16
	Num Lock	1
	Caps Lock	1
	Scroll Lock	1
	Operating Temp	-10℃~60℃

Work environment	Storage Temp	-20℃~70℃
	Humidity	0%-95%RH
Cabinet Material	high-strength and Anti-corrosive steel plate	
Color	Insulated black (optional)	
For Cabinet	800-1040mm	
Net weight	12KG-16KG	
Gross Weight	16KG-20KG	
Dimension	520mm*480.4mm*44mm (L x W x H)	
Package	708mm*608mm*195mm (L x W x H)	
Certificate	CE , FCC , RHOS	

Ordering information


IPKVM - 1508M	1U Rack mount 15" TFT LED KVM switch, W/ Keyboard +touchpad ,W/ 8 VGA port over IP access, W/ 12V power supply
IP KVM - 1516M	1U Rack mount 15" TFT LED KVM switch , W/ Keyboard +touchpad , W/ 16 VGA port over IP access, W/ 12V power supply

IO View





Drawing

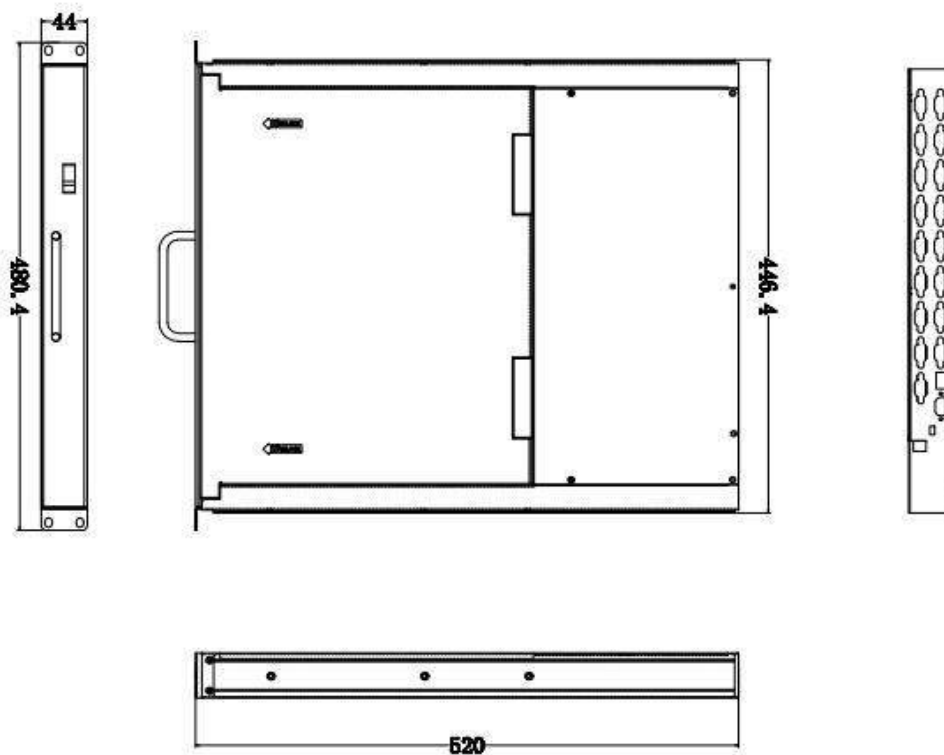

IP KVM-1700M series

8ports/16ports 1U rack mount 17" LED KVM drawer over IP



Main features

- « KVM (keyboard, video ,mouse) access over IP and analogous telephone line (modem needed) .
- « Full control under any OS, in BIOS mode , during boot, at Blue Screen
- « 256 bit SSL encryption of all transmitted data and certificate management
- « Port to connect a user console for direct analogous access to KVM switch
- « Can be used with most standard KVM
- « To switch the host computer though the hotkey or OSD menu, which can manage up to 512 computers.
- « Password security protection, only authorized users can view and manage on-line computer.
- « Support a variety of brand industrial computer and the server: EVOC/Lenovo/IBM/DELL/HP/SUN, etc
- « Support various operating system: Microsoft, Linux, Unix, etc.

Introduction

« IP-KVM switch can save your Money ,Time, Space, Equipment and Power . IP KVM switch defines a new class of remote KVM switch devices. IP KVM switch combines digital remote KVM access via IP networks with comprehensive and integrated system management.

« IP KVM Switch provides convenient, remote KVM access and control via LAN or internet . it captures, digitizes, and compresses video signal and transmits it with keyboard and mouse signals to and from a remote computer. IP KVM switch provides a non-intrusive solution for remote access and control . Remote access and control software runs on its embedded processors only but not on mission-critical servers, so that there is no interference with server operation or impact on network performance.

Specification

Model	IP KVM-1708M	IP KVM-1716M
Computer connect	Direct : 8	Direct : 16
	Max : 256	Max : 512
Connector port	8 /16 * HDB-15 female (Yellow)	
IP Module console	1* RJ45 port, 1* VGA port (male) ,1* USB	
Local console	2* USB (Keyboard , Mouse)	
	1* HDB-15 female (Blue)	
Selection connection	Support daisy-chained serial connection(8 levels) and stacking cascade connection (2 levels).	
Keyboard	104 Mechanical mute Keyboard	
Mouse	Touchpad	
Switch Mode	Hotkey , OSD Menu	
Auto scanning interval	5 - 99 second	
Power input	DC12V input , (AC100-240V 47-63Hz, 35W) optional	
LED Indicator	Power indicator	2
	Selection indicator	16
	Boost on-line indicator	16
	Num Lock	1
	Caps Lock	1
	Scroll Lock	1
Work environment	Operating Temp	-10℃~60℃
	Storage Temp	-20℃~70℃
	Humidity	0%-95%RH
Cabinet Material	high-strength and Anti-corrosive steel plate	

Color	Insulated black (optional)
For Cabinet	800-1040mm
Net weight	14KG-17KG
Gross Weight	18KG-21KG
Dimension	567.8mm*480.4mm*44mm (L x W x H)
Package	708mm*608mm*195mm (L x W x H)
Certificate	CE , FCC , RHOS


Ordering information

IPKVM - 1708M	1U Rack mount 17" TFT LED KVM switch,W/ Keyboard + Touchpad, W/ 8 VGA port over IP access, W/ 12V power supply
IP KVM - 1716M	1U Rack mount 17" TFT LED KVM switch, W/ Keyboard + Touchpad, W/ 16 VGA port over IP access, W/ 12V power supply

IO View



Drawing

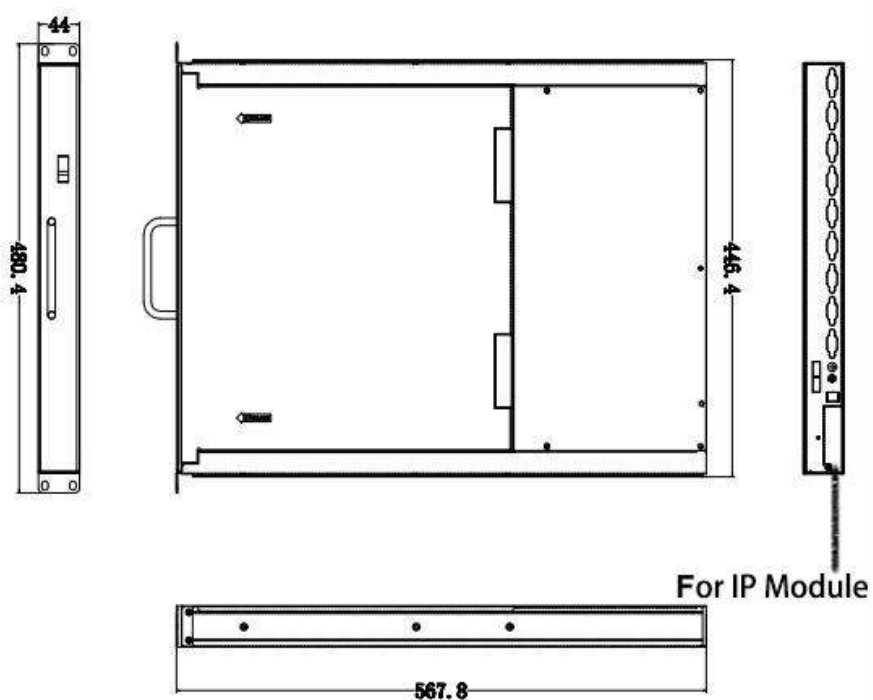

Accessories



On the top of Cartons:

VGA Cable

A pair of hanging ears

Warranty card and User Manual

Power cord

Power Adapter



On bottom of Cartons:

VGA Cable

IP KVM-1900M series

8ports/16ports 1U rack mount 19" LED KVM drawer over IP



Main features

- « KVM (keyboard, video ,mouse) access over IP and analogous telephone line (modem needed) .
- « Full control under any OS, in BIOS mode , during boot, at Blue Screen
- « 256 bit SSL encryption of all transmitted data and certificate management
- « Port to connect a user console for direct analogous access to KVM switch
- « Can be used with most standard KVM
- « To switch the host computer though the hotkey or OSD menu, which can manage up to 512 computers.
- « Password security protection, only authorized users can view and manage on-line computer.
- « Support a variety of brand industrial computer and the server: EVOC/Lenovo/IBM/DELL/HP/SUN, etc
- « Support various operating system: Microsoft, Linux, Unix, etc.

Introduction

« IP-KVM switch can save your Money ,Time, Space, Equipment and Power . IP KVM switch defines a new class of remote KVM switch devices. IP KVM switch combines digital remote KVM access via IP networks with comprehensive and integrated system management.

« IP KVM Switch provides convenient, remote KVM access and control via LAN or internet . it captures, digitizes, and compresses video signal and transmits it with keyboard and mouse signals to and from a remote computer. IP KVM switch provides a non-intrusive solution for remote access and control . Remote access and control software runs on its embedded processors only but not on mission-critical servers, so that there is no interference with server operation or impact on network performance.

Specification

Model	IP KVM-1908M	IP KVM-1916M
Computer connect	Direct : 8	Direct : 16
	Max :256	Max : 512
Connector port	8 /16 * HDB-15 female (Yellow)	
IP Module console	1* RJ45 port ,1* VGA port (male) , 1* USB	
Selection connection	Support daisy-chained serial connection(8 levels) and stacking cascade connection (2 levels).	
Keyboard	104 Mechanical mute Keyboard	
Mouse	Touchpad	
Switch Mode	Hotkey , OSD Menu	
Auto scanning interval	5 - 99 second	
Power input	DC12V input , (AC100-240V 47-63Hz, 35W) optional	
LED Indicator	Power indicator	2
	Selection indicator	16
	Boost on-line indicator	16
	Num Lock	1
	Caps Lock	1
	Scroll Lock	1
Work environment	Operating Temp	-10℃~60℃
	Storage Temp	-20℃~70℃
	Humidity	0%-95%RH
Cabinet Material	high-strength and Anti-corrosive steel plate	
Color	Insulated black (optional)	

For Cabinet	800-1040mm
Net weight	15KG-18KG
Gross Weight	18KG-22KG
Dimension	610mm*480.4mm*44mm (L x W x H)
Package	738mm*608mm*195mm (L x W x H)
Certificate	CE , FCC , RHOS


Ordering information

IPKVM - 1908M	1U Rack mount 19" TFT LED KVM switch, W/ Keyboard +touchpad, W/ 8 VGA port over IP access, W/ 12V power supply
IP KVM - 1916M	1U Rack mount 19" TFT LED KVM switch,W/ Keyboard + touchpad , W/ 16 VGA port over IP access, W/ 12V power supply

IO View



Drawing

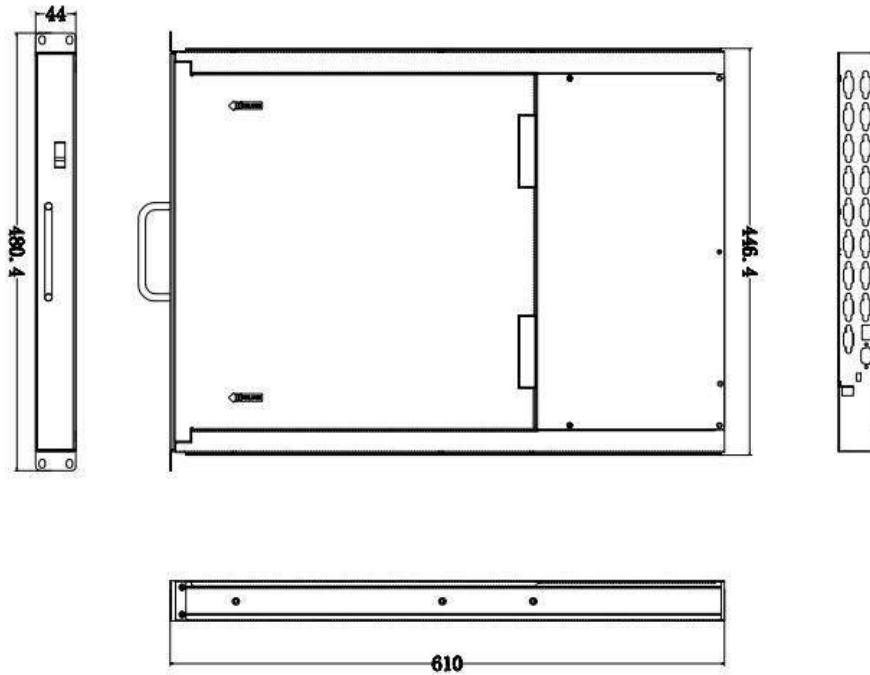

Accessories



On the top of Cartons:

VGA Cable

A pair of hanging ears

Warranty card and User Manual

Power cord

Power Adapter



On bottom of Cartons:

VGA Cable



IP KVM-1700C series

CAT5 8ports/16ports/32ports 1U rack mount 17" LED KVM drawer over IP



Main features

- « 17" LED KVM switch with touch pad+Mouse
- « 104keys keyboard with integrated Digital&E-switch keys.
- « Excellent video effects, the best resolution is up to 1280*1024@ 75HZ.
- « Supports front USB for keyboard/mouse
- « Support USB+PS2 local console
- « Supports computer indicator when user switch to another computer.
- « Support cascading connection, max up to 1024 computer.

Introduction

- « Withdrawing installation design, the length can be adjusted to fit the rack space.
- « Humanized design, can be installed and removed by only one person , which improves the efficiency of the administrator.
- « To switch the host computer though the hotkey or OSD menu, which can manage up to 1024 computers.
- « Password security protection, only authorized users can view and manage on-line computer.

- « Support a variety of brand industrial computer and the sever, eg: EVOC / Lenovo / IBM / DELL / HP/ SUN, ect .
- « Support various operating system: Window XP, 7 /8 / 10 ,Microsoft, Linux, Unix,etc.

Specification

Model	IP KVM-1708C	IP KVM-1716C	IP KVM-1732C
Computer connect	Direct : 8 (Max:256)	Direct : 16 (Max:512)	Direct : 32 (Max :1024)
Keyboard	104 Mechanical mute Keyboard		
Mouse	Touchpad		
Switch Mode	Hotkey , OSD Menu , Panel Button		
Auto-scanning interval	5~99 second		
LCD resolution	1280 *1024 DDC2B		
Safety performance	Provide access control list function		
Power input	DC12V input , (AC100-240V 47-63Hz, 35W) optional		
Cable Port	Local console	Keyboard / Mouse/ Display (2*USB +1* HDB-15 female)	
	Connector port	8 /16 /32 * RJ45 (CAT5 port)	
	Power supply	1 * 3 pin AC power supply socket	
	Support Daisy-chain series connectors (8 level)		
LED Indicator	Power indicator	2	
	Selection indicator	16	
	Boost on-line indicator	16	
	Num Lock	1	
	Caps Lock	1	
	Scroll Lock	1	
Work environment	Operating Temp	-10℃~60℃	
	Storage Temp	-20℃~70℃	
	Humidity	0%-95%RH	
Cabinet Material	high-strength and Anti-corrosive steel plate		
Color	Insulated black (optional)		
For Cabinet	800-1040mm		
Net weight	13KG-17KG		

Gross Weight	17KG-22KG
Dimension	568*480*44mm(L x W x H)
Package	708*608*195mm (L x W x H)
Certificate	CE , FCC , RHOS

Ordering information


IP KVM - 1708C	1U Rack mount 17" TFT LED KVM Drawer with 8 port over IP
IP KVM - 1716C	1U Rack mount 17" TFT LED KVM Drawer with 16 port over IP
IP KVM - 1732C	1U Rack mount 17" TFT LED KVM Drawer with 32 port over IP

IO View





Drawing

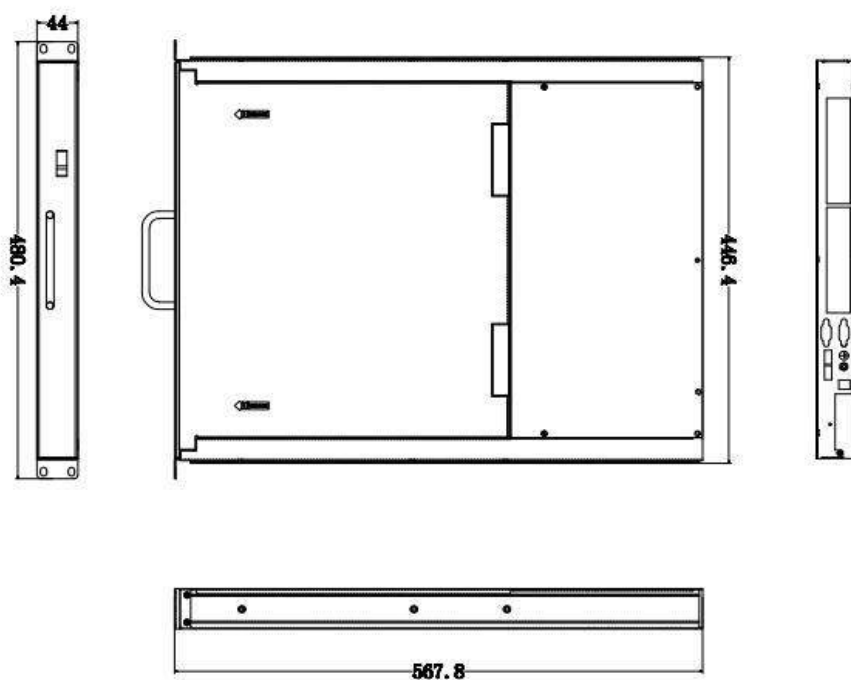

IP KVM-1900C series

CAT5 8ports/16ports/32ports 1U rack mount 19" LED KVM drawer over IP



Main features

- « KVM (keyboard, video ,mouse) access over IP and analogous telephone line (modem needed) .
- « Full control under any OS, in BIOS mode , during boot, at Blue Screen
- « 256 bit SSL encryption of all transmitted data and certificate management
- « Port to connect a user console for direct analogous access to KVM switch
- « Can be used with most standard KVM
- « To switch the host computer though the hotkey or OSD menu, which can manage up to 1024 computers.
- « Password security protection, only authorized users can view and manage on-line computer.
- « Support a variety of brand industrial computer and the server:
EVOC/Lenovo/IBM/DELL/HP/SUN, etc
- « Support various operating system: Microsoft, Linux, Unix, etc.

Introduction

« IP-KVM switch can save your Money ,Time, Space, Equipment and Power . IP KVM switch defines a new class of remote KVM switch devices. IP KVM switch combines digital remote KVM access via IP networks with comprehensive and integrated system management.

« IP KVM Switch provides convenient, remote KVM access and control via LAN or internet . it captures, digitizes, and compresses video signal and transmits it with keyboard and mouse signals to and from a remote computer. IP KVM switch provides a non-intrusive solution for remote access and control . Remote access and control software runs on its embedded processors only but not on mission-critical servers, so that there is no interference with server operation or impact on network performance.

Specification

Model	IP KVM-1908C	IP KVM-1916C	IP KVM-1932C
Computer connect	Direct : 8 (Max :256)	Direct : 16 (Max : 512)	Direct : 32 (Max : 1024)
Keyboard	104 Mechanical mute Keyboard		
Mouse	Touchpad		
Switch Mode	Hotkey , OSD Menu , Panel Button		
Auto-scanning interval	5-99second		
LCD resolution	1280 *1024 DDC2B		
Safety performance	Provide access control list function		
Power input	DC12V input , (AC100-240V 47-63Hz, 35W) optional		
Cable Port	Local console	Keyboard / Mouse/ Display (2*USB +1* HDB-15 female)	
	Connector port	8 /16 /32 * RJ45 (CAT5 port)	
	Power supply	1 * 3 pin AC power supply socket	
	Support Daisy-chain series connectors (8 level)		
LED Indicator	Power indicator	2	
	Selection indicator	16	
	Boost on-line indicator	16	
	Num Lock	1	
	Caps Lock	1	
	Scroll Lock	1	
	Operating Temp	-10℃~60℃	

Work environment	Storage Temp	-20℃~70℃
	Humidity	0%-95%RH
Cabinet Material	high-strength and Anti-corrosive steel plate	
Color	Insulated black (optional)	
For Cabinet	800-1040mm	
Net weight	14KG-17KG	
Gross Weight	17KG-22KG	
Dimension	600mm*480mm*44mm (L x W x H)	
Package	738*608*195mm (L x W x H)	
Certificate	CE , FCC , RHOS	


Ordering information

IP KVM - 1908C	1U Rack mount 19" TFT LED KVM Drawer with 8 port over IP
IP KVM - 1916C	1U Rack mount 19" TFT LED KVM Drawer with 16 port over IP
IP KVM - 1932C	1U Rack mount 19" TFT LED KVM Drawer with 32 port over IP

IO View



Drawing

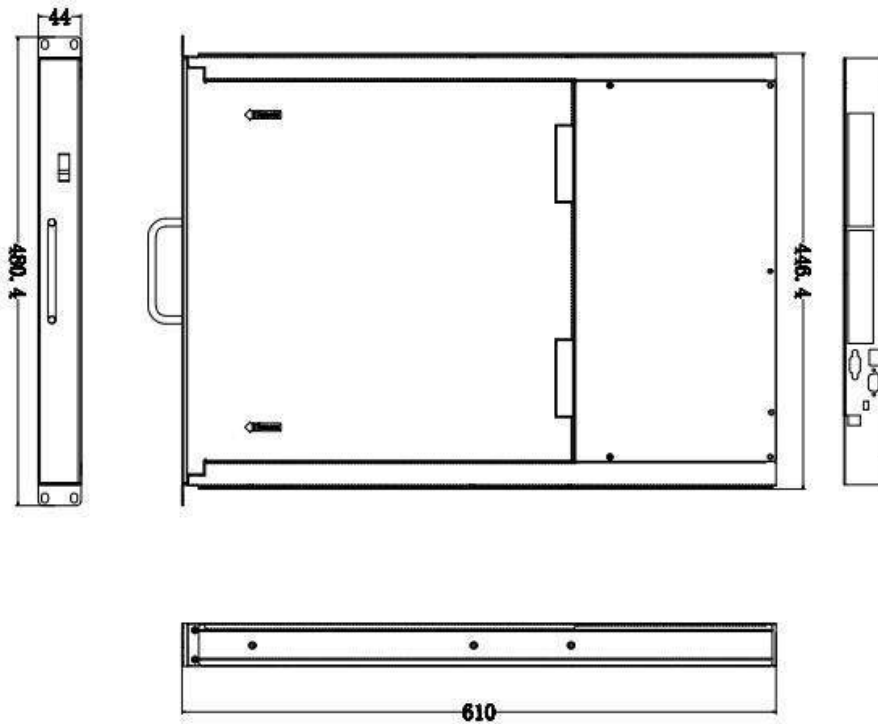

Accessories

